


FLEXADUX P7MPU-FOOD

Heavy weight and flexible Polyurethane hose, food grade

Applications	food production & -conveying, pharmaceutical production, extraction systems, conveying of abrasive media, conveying technology
Structure	TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	good flexibility, very good low-temperature flexibility, very good abrasion resistance, very smooth inside, corrugated outside, free of halogen & softeners
Norms	material according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 certified according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C, D1, D2, E FDA standard 21 CFR 177.2600 & 178.2010 manufacturing process according to GMP EC 2023/2006

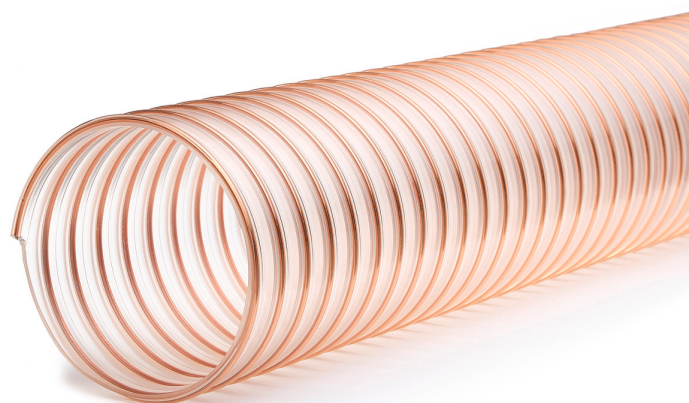

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,00	1,40	25	3,75	0,90	2,61	10	07606025-1000-000-00
25	33,00	1,40	25	3,75	0,90	3,92	15	07606025-1500-000-00
32	41,00	1,40	32	3,56	0,86	3,99	10	07606032-1000-000-00
32	41,00	1,40	32	3,56	0,86	5,98	15	07606032-1500-000-00
38	47,00	1,40	38	2,88	0,70	9,35	20	07606038-2000-000-00
38	47,00	1,40	38	2,88	0,70	4,67	10	07606038-1000-000-00
38	47,00	1,40	38	2,88	0,70	7,01	15	07606038-1500-000-00
40	49,00	1,40	40	2,88	0,70	4,90	10	07606040-1000-000-00
40	49,00	1,40	40	2,88	0,70	7,35	15	07606040-1500-000-00
40	49,00	1,40	40	2,88	0,70	9,80	20	07606040-2000-000-00
50	59,00	1,40	50	2,38	0,60	6,44	10	07606050-1000-000-00
50	59,00	1,40	50	2,38	0,60	9,65	15	07606050-1500-000-00
50	59,00	1,40	50	2,38	0,60	12,87	20	07606050-2000-000-00
60	69,00	1,40	60	2,25	0,55	7,65	10	07606060-1000-000-00
60	69,00	1,40	60	2,25	0,55	11,48	15	07606060-1500-000-00
65	74,00	1,40	65	2,15	0,55	8,26	10	07606065-1000-000-00
65	74,00	1,40	65	2,15	0,55	12,39	15	07606065-1500-000-00
75	84,00	1,40	75	1,75	0,50	9,47	10	07606075-1000-000-00
75	84,00	1,40	75	1,75	0,50	14,21	15	07606075-1500-000-00
80	89,00	1,40	80	1,50	0,45	10,08	10	07606080-1000-000-00
80	89,00	1,40	80	1,50	0,45	15,12	15	07606080-1500-000-00
90	99,00	1,40	90	1,35	0,40	11,29	10	07606090-1000-000-00

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
90	99,00	1,40	90	1,35	0,40	16,94	15	07606090-1500-000-00
100	110,00	1,40	100	1,21	0,40	13,51	10	07606100-1000-000-00
100	110,00	1,40	100	1,21	0,40	20,26	15	07606100-1500-000-00
110	120,00	1,40	110	1,15	0,38	14,81	10	07606110-1000-000-00
110	120,00	1,40	110	1,15	0,38	22,21	15	07606110-1500-000-00
120	130,00	1,40	120	0,99	0,30	16,11	10	07606120-1000-000-00
120	130,00	1,40	120	0,99	0,30	24,16	15	07606120-1500-000-00
125	135,00	1,40	125	0,88	0,25	16,75	10	07606125-1000-000-00
125	135,00	1,40	125	0,88	0,25	25,13	15	07606125-1500-000-00
140	150,00	1,40	140	0,77	0,20	18,70	10	07606140-1000-000-00
140	150,00	1,40	140	0,77	0,20	28,05	15	07606140-1500-000-00
150	160,00	1,40	150	0,77	0,20	24,28	10	07606150-1000-000-00
150	160,00	1,40	150	0,77	0,20	36,42	15	07606150-1500-000-00
160	170,00	1,40	160	0,66	0,20	12,93	5	07606160-0500-000-00
160	170,00	1,40	160	0,66	0,20	25,86	10	07606160-1000-000-00
160	170,00	1,40	160	0,66	0,20	38,79	15	07606160-1500-000-00
180	190,00	1,40	180	0,55	0,15	14,51	5	07606180-0500-000-00
180	190,00	1,40	180	0,55	0,15	29,01	10	07606180-1000-000-00
180	190,00	1,40	180	0,55	0,15	43,52	15	07606180-1500-000-00
200	211,00	1,40	200	0,55	0,15	14,96	5	07606200-0500-000-00
200	211,00	1,40	200	0,55	0,15	29,92	10	07606200-1000-000-00
200	211,00	1,40	200	0,55	0,15	44,88	15	07606200-1500-000-00
250	261,00	1,40	250	0,38	0,10	18,60	5	07606250-0500-000-00
250	261,00	1,40	250	0,38	0,10	37,19	10	07606250-1000-000-00
250	261,00	1,40	250	0,38	0,10	55,79	15	07606250-1500-000-00