


SMARTFLEX 1.4

Medium weight and flexible spiral hose made of Polyurethane, flame retardant

Applications	wood dust extraction, sawing & milling, grass extraction, leaf extraction, conveying of abrasive media
Structure	TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	flame-retardant, permanently antistatic ($R < 10^9$ Ohm), hydrolysis & microbe resistant, good flexibility, very smooth inside, corrugated outside
Norms	flame-retardant according to DIN 4102 / B1 TRBS 2153/TRGS 727, ATEX 2014/34/EU / pneumatic transport of combustible dusts (inside: zone 20, 21, 22), ATEX 2014/34/EU / conveying of flammable liquids (inside: zone 0, 1, 2) discharge capability according to BGI 739-2 with spiral earthing DIN 26057-3

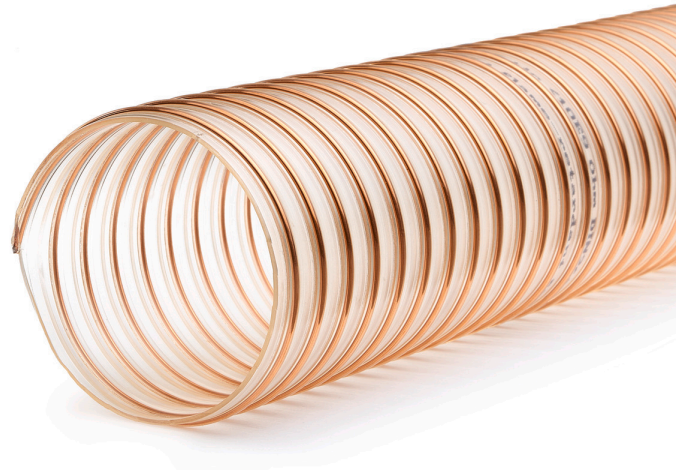

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
25	33,00	1,40	25	3,75	0,90	2,41	10	08800025-1000-000-00
25	33,00	1,40	25	3,75	0,90	3,62	15	08800025-1500-000-00
32	41,00	1,40	32	3,56	0,86	4,09	10	08800032-1000-000-00
32	41,00	1,40	32	3,56	0,86	6,13	15	08800032-1500-000-00
38	47,00	1,40	38	2,88	0,70	4,67	10	08800038-1000-000-00
38	47,00	1,40	38	2,88	0,70	7,01	15	08800038-1500-000-00
40	49,00	1,40	40	2,88	0,70	4,90	10	08800040-1000-000-00
40	49,00	1,40	40	2,88	0,70	7,35	15	08800040-1500-000-00
50	59,00	1,40	50	2,38	0,60	6,44	10	08800050-1000-000-00
50	59,00	1,40	50	2,38	0,60	9,65	15	08800050-1500-000-00
60	69,00	1,40	60	2,25	0,55	7,65	10	08800060-1000-000-00
60	69,00	1,40	60	2,25	0,55	11,48	15	08800060-1500-000-00
65	74,00	1,40	65	2,15	0,55	8,26	10	08800065-1000-000-00
65	74,00	1,40	65	2,15	0,55	12,39	15	08800065-1500-000-00
70	79,00	1,40	70	2,00	0,55	8,87	10	08800070-1000-000-00
70	79,00	1,40	70	2,00	0,55	13,30	15	08800070-1500-000-00
76	85,00	1,40	76	1,75	0,50	9,59	10	08800076-1000-000-00
76	85,00	1,40	76	1,75	0,50	14,39	15	08800076-1500-000-00
80	89,00	1,40	80	1,50	0,45	15,12	15	08800080-1500-000-00
80	89,00	1,40	80	1,50	0,45	10,08	10	08800080-1000-000-00
90	99,00	1,40	90	1,35	0,40	11,29	10	08800090-1000-000-00
90	99,00	1,40	90	1,35	0,40	16,94	15	08800090-1500-000-00

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
100	110,00	1,40	100	1,21	0,40	13,51	10	08800100-1000-000-00
100	110,00	1,40	100	1,21	0,40	20,26	15	08800100-1500-000-00
110	120,00	1,40	110	1,15	0,38	15,81	10	08800110-1000-000-00
110	120,00	1,40	110	1,15	0,38	23,71	15	08800110-1500-000-00
120	130,00	1,40	120	0,99	0,30	16,11	10	08800120-1000-000-00
120	130,00	1,40	120	0,99	0,30	24,16	15	08800120-1500-000-00
140	150,00	1,40	140	0,77	0,20	28,05	15	08800140-1500-000-00
140	150,00	1,40	140	0,77	0,20	18,70	10	08800140-1000-000-00
150	160,00	1,40	150	0,77	0,20	20,00	10	08800150-1000-000-00
150	160,00	1,40	150	0,77	0,20	30,00	15	08800150-1500-000-00
160	170,00	1,40	160	0,66	0,20	21,30	10	08800160-1000-000-00
160	170,00	1,40	160	0,66	0,20	31,95	15	08800160-1500-000-00
180	190,00	1,40	180	0,55	0,15	29,01	10	08800180-1000-000-00
180	190,00	1,40	180	0,55	0,15	43,52	15	08800180-1500-000-00
200	211,00	1,40	200	0,55	0,15	27,96	10	08800200-1000-000-00
200	211,00	1,40	200	0,55	0,15	41,93	15	08800200-1500-000-00
250	261,00	1,40	250	0,38	0,10	34,75	10	08800250-1000-000-00
250	261,00	1,40	250	0,38	0,10	52,12	15	08800250-1500-000-00
300	311,00	1,40	300	0,30	0,10	41,54	10	08800300-1000-000-00
350	361,00	1,40	350	0,28	0,09	23,03	5	08800350-0500-000-00
350	361,00	1,40	350	0,28	0,09	46,07	10	08800350-1000-000-00
400	411,00	1,40	400	0,25	0,09	30,41	5	08800400-0500-000-00
400	411,00	1,40	400	0,25	0,09	60,83	10	08800400-1000-000-00
450	461,00	1,40	450	0,13	0,08	34,17	5	08800450-0500-000-00
450	461,00	1,40	450	0,13	0,08	68,34	10	08800450-1000-000-00
500	511,00	1,40	500	0,10	0,07	37,92	5	08800500-0500-000-00
500	511,00	1,40	500	0,10	0,07	75,84	10	08800500-1000-000-00